




hush.

Install Guide
Galaxy


Quiet by design

- Prior to installation, installers are advised to unpack and lay out panels to determine the most aesthetically pleasing arrangement of panels.


1. Locate 3 of the diamond-shaped cloud sections, place them with the open side down on a flat surface as shown below.

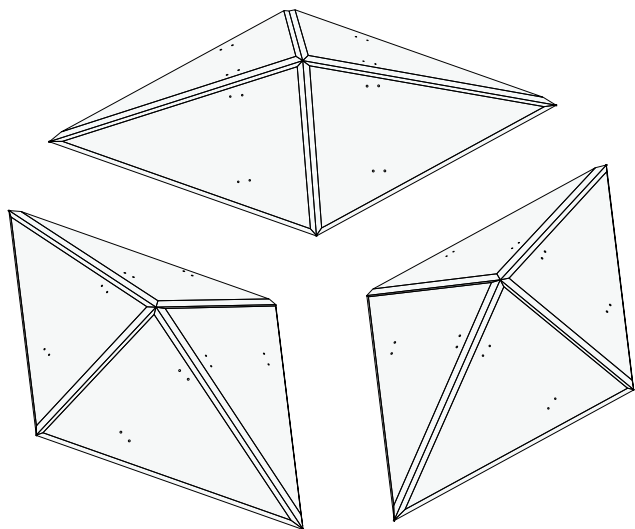

2. Bring the 3 diamond-shaped sections together as shown below, ensuring that they meet in the center.

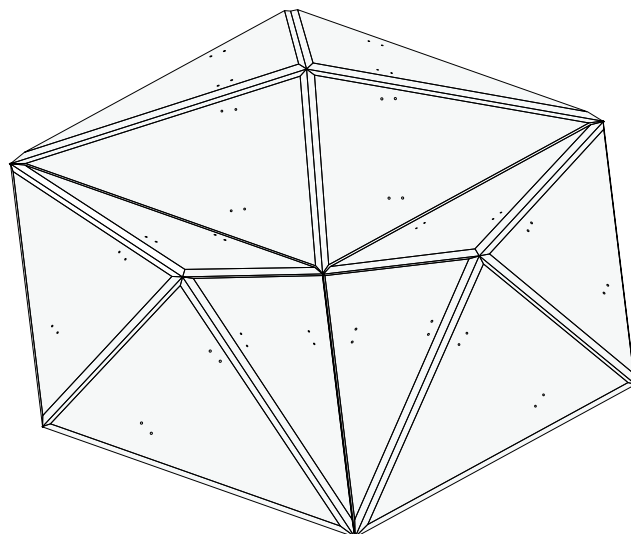


3. Now, apply a small bead of construction adhesive between the pre-marked screw holes on one of the diamond-shaped sections.

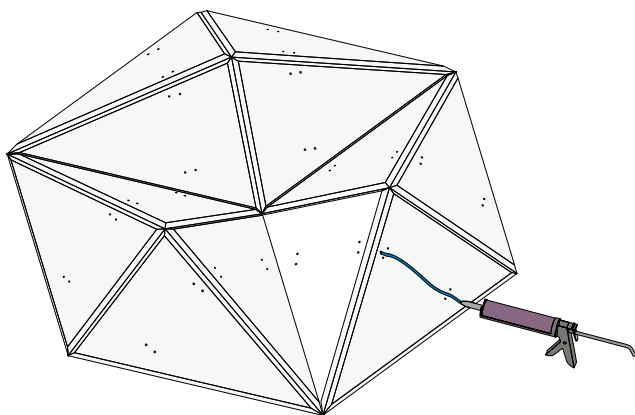


4. Repeat this process to the sections as shown below.

(Please note; this process needs to be completed as quickly as possible to prevent the glue from beginning to dry.)

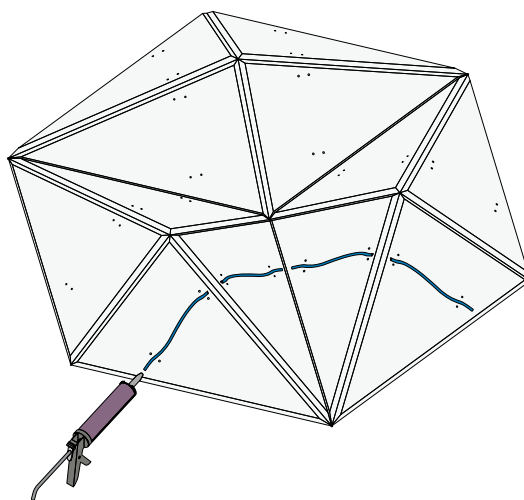


5. Now place the metal bracket over the glue-beads, aligning the holes in the bracket with the pre-marked holes on the cloud sections.

(Please note; this process needs to be completed as quickly as possible to prevent the glue from beginning to dry.)

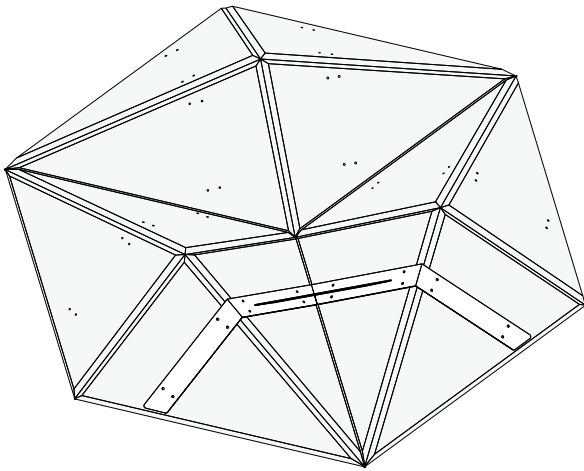


6. Using the screws provided, fasten the metal bracket to the cloud sections. Take care to ensure that the screws are not overtightened.

(We recommend using a hand screwdriver)

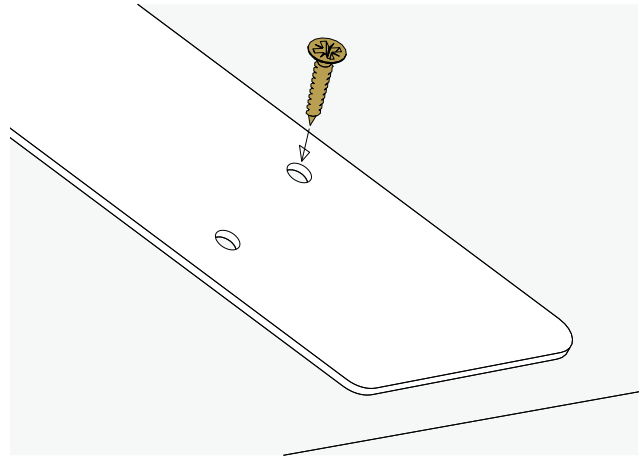

7. Repeat steps 3-6 for the other two brackets, your finished cloud will be as shown below.

(Please allow the construction adhesive to dry before suspending the cloud. (Refer to instructions on the glue for drying time)

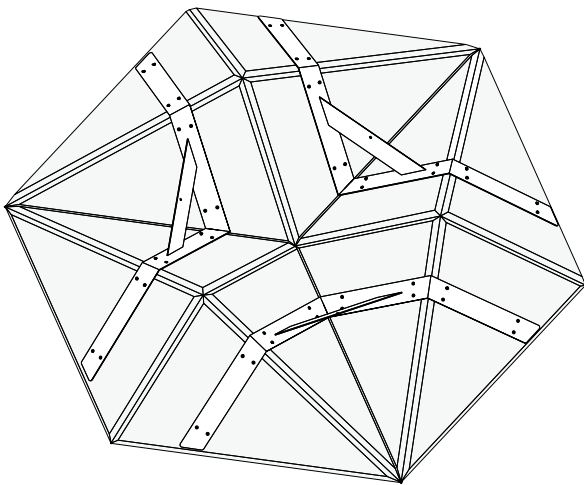

8. After the adhesive has dried, attach a clevis-hook to each of 3 the metal brackets. You are now ready to mount the suspension hardware to the ceiling. Please refer to the Ceiling Hardware Install Guide document.

