

**hush.**

Murals

Spec Document




Check the product page

*Quiet by Design*



Natural Mural · White Brick · Reception

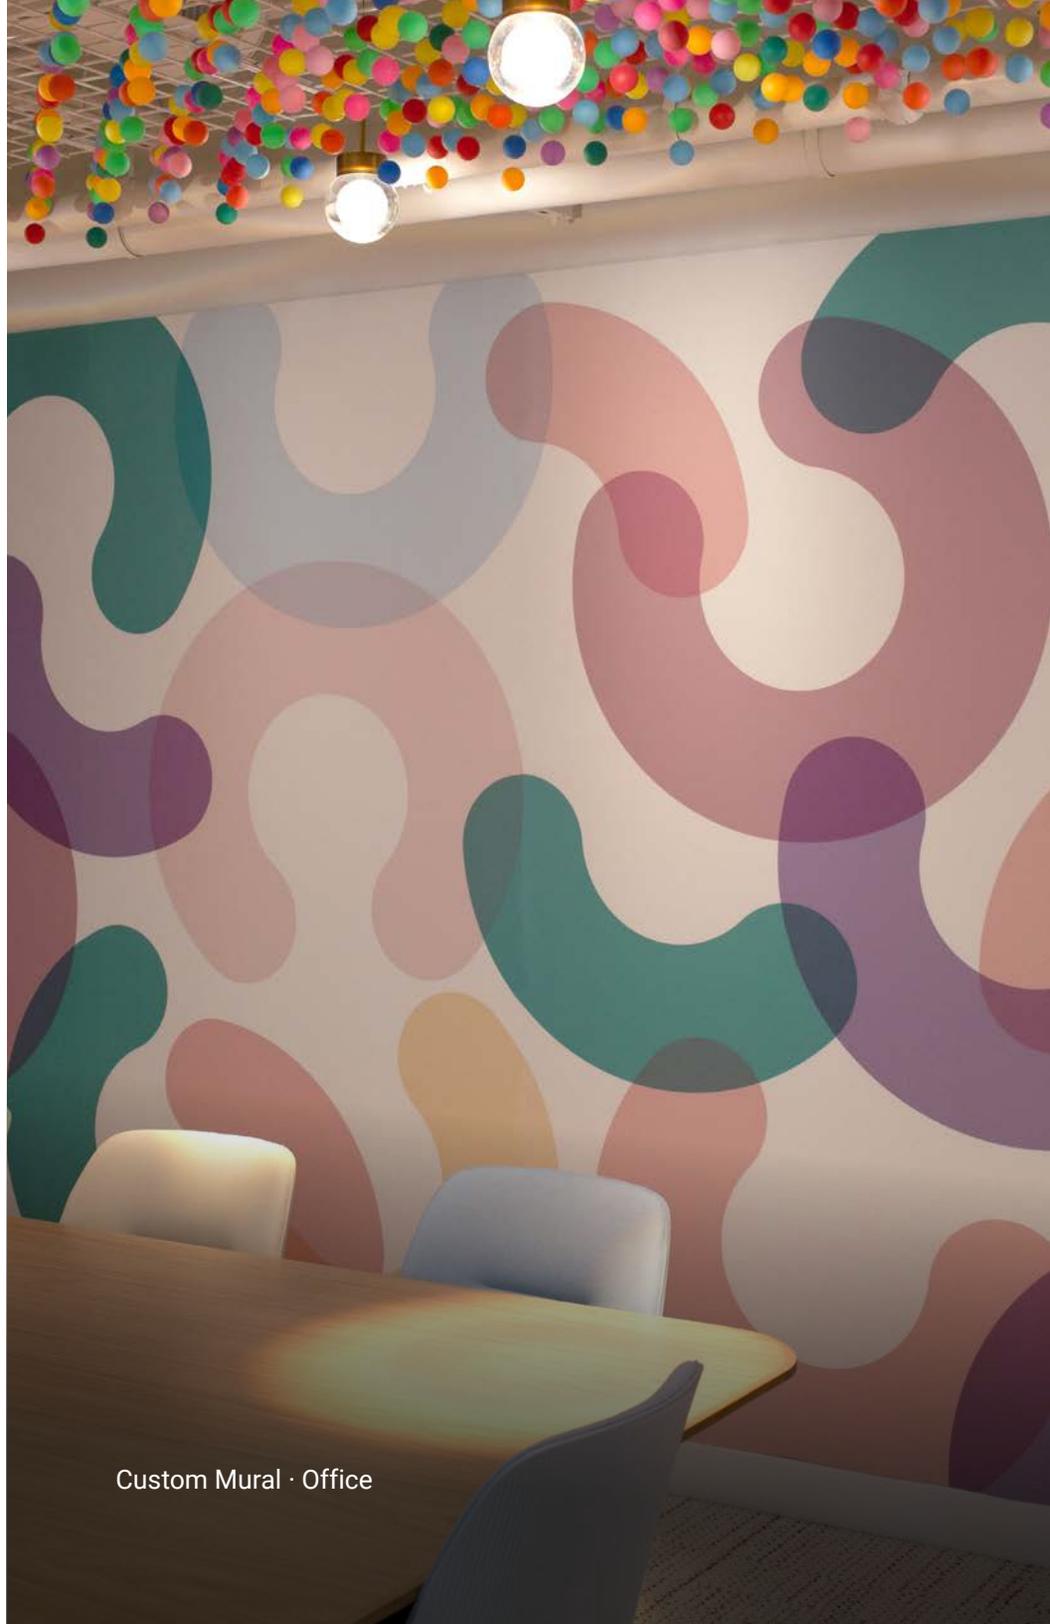

Custom Mural · Office


# Murals

With our line of printed Murals, you can enhance the look and feel of your interior space.

## PRODUCT SPECIFICATIONS

Composition	100% PET (Polyethylene Terephthalate); 60% recycled material
Thickness	12mm
Product Placement	Wall, Ceiling
NRC	0.80
Fire Rating	CAN/ULC-S102 Class A ASTM E84 Class A
Sustainability	100% Recyclable
Warranty	2 Year Limited

## NOISE REDUCTION COEFFICIENT COMPARISON

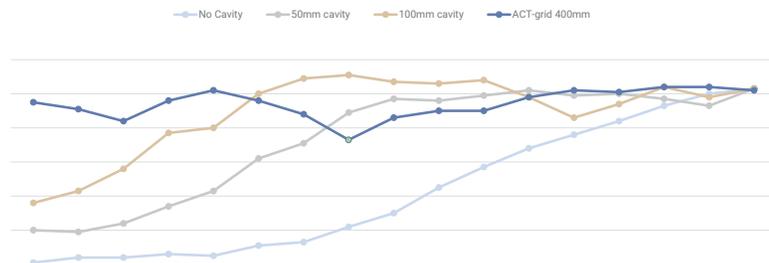

Full NRC comparison available upon request



DARK SPRUCE



WHITE BRICK



WHITE OAK



WHITEWASH



CUSTOM PRINTS

# Murals

## GREENGUARD® GOLD CERTIFICATION

Hush Acoustics has achieved full GreenGuard® Gold sustainability certification, a mark of excellence that ensures our products meet strict standards for low chemical emissions, promoting healthier indoor air quality.

This recognition gives architects, designers, and consumers confidence in choosing Hush for environmentally responsible solutions. Beyond sustainability, Hush's felt products offer excellent sound-absorbing properties, making them ideal for creating quieter, more comfortable spaces.

## SUSTAINABILITY

Manufactured from 100% PET(60% recycled material), our felt products demonstrate our commitment to both environmental stewardship and functional design, contributing to a greener and quieter future. It comprising of flame-retardant fiber as new material ensuring ASTM E84 class A certification. The high strength of PET panels in comparison to its weight is the key to its superior energy efficiency.

## FUNGAL RESISTANT

Independently tested by EMSL Canada, Hush P.E.T. felt showed zero mold growth under ASTM C1338 laboratory conditions, confirming exceptional durability.

## WARRANTY

2 year limited warranty. See F.A.Q. page on our website for more information.

## COMPLIMENTARY DOCUMENTATION



Environmental  
Product Declaration



Felt  
Maintenance Guide



Flame  
Spread



Panel Printing  
Protocol

See Resource Hub page on website for more documentation

## MURALS

<i>mm</i>	<i>inches</i>
1200 x 1200 x 12	47.2 x 47.2 x 0.5
1200 x 2700 x 12	47.2 x 106.3 x 0.5

\* Custom sizes available upon request


\*\* Custom artwork or files that need altering may incur extra charges

# Murals

## HOW TO SPECIFY

### 1. Select Size

See [page 4](#) for full size chart

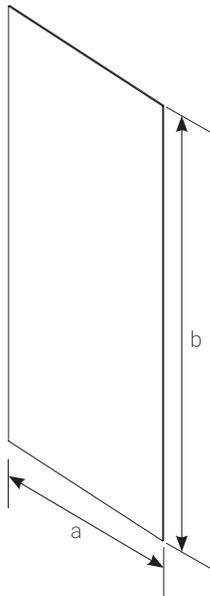

### 2. Select Pattern or Prepare Artwork




Dark Spruce



White Brick



White Oak

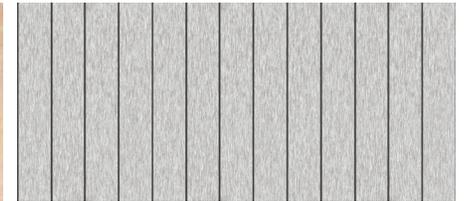

Whitewash



Custom Print

*\* Please Note; All mural options are printed on our Snow Element Color*

# Murals


Prior to installation, installers are advised to unpack and lay out panels to determine the most aesthetically pleasing arrangement.

## INSTALLATION INSTRUCTIONS


1. Locate the back of the panel.  
*(Note; the back of the tile will have no beveled edges).*




2. On the back of the panel, starting at the top corner, apply a bead of adhesive that is approximately 1/4" wide.



3. Continue the bead of adhesive across the width of the panel.




4. Working quickly, complete the panel in a back-and-forth pattern as shown below.




5. Your panel is now ready to be installed on the wall in the desired location.

*(Please note that the panel should be mounted on the wall within 60 seconds of applying adhesive).*



6. With the panel located on the wall, apply firm pressure evenly over the entire surface of the panel and hold it in place for 30 seconds. The panel is now installed. Repeat steps 1-6 for all remaining tiles.





Custom Mural · Office

# hush.

Tailored for Architects, Interior Designers, and General Contractors, we serve as a fast, expert, and reliable partner for all your project ideas.

## *Quiet by Design*



Proudly Made  
in North America



2 Year  
Limited Warranty



**GreenGuard Gold®  
Certified**  
All Hush products  
exceed GreenGuard  
Gold® indoor air  
quality standards



**Fungal Resistant  
Certified**  
EMSL Canada verified  
zero mold growth  
for Hush P.E.T. felt  
(ASTM C1338).

hello@hushacoustics.ca · 1.332.266.9107  
733 3rd Ave · Floor 16 #1067  
New York, NY 10017 United States

Follow us on Instagram  
@hush.acoustics



[hushacousticsUSA.com](https://hushacousticsUSA.com)